



LEVEL UP TO INTELLIGENT COMFORT WITH THE

AI CONDITIONER



FORTUNE GLOBAL 500



MIDEA GROUP HAS RANKED #246 IN
THE 2025 FORTUNE GLOBAL 500 LIST.
THIS IS THE 10TH CONSECUTIVE YEAR
WE HAVE FEATURED IN THE FORTUNE
GLOBAL 500 LIST—A PROOF OF OUR
COMMITMENT TO QUALITY, DESIGN,
TECHNOLOGY, INNOVATION, AND
SUSTAINABILITY.

MIDEA'S GLOBAL PRESENCE

38

Global R&D
Centers

60

Production
Bases

1,90,000+

Employees



OPERATING IN 200+ COUNTRIES & REGIONS

EXPERIENCE EXCELLENCE WITH MIDEA

THE INTELLIGENT AIR CONDITIONING

Midea's range of air conditioners combines cutting-edge technology, unmatched energy efficiency, and exceptional performance to deliver comfort tailored for the Indian climate. Engineered with advanced cooling systems, these state-of-the-art ACs ensure powerful and consistent cooling while optimising energy consumption, helping you save on electricity bills.

Midea elevates everyday comfort with intelligent features such as AI-Ecomaster for smart energy optimisation, hands-free Voice Control for effortless operation, and Prime Guard with Hydrophilic Blue Fin coating for enhanced durability and corrosion resistance. Designed for long-lasting performance even in extreme conditions, Midea ACs bring together innovation, convenience, and reliability.

Backed by over a decade of innovation and more than 1 lakh global patents, and supported by a strong local service network, Midea stands for trust, peace of mind, and a seamless ownership experience.



THE JOURNEY OF MIDEA GROUP

RISE OF GLOBAL EXPANSION

1968

Mr. He Xiangjian led a group of 23 Beijiao residents to start the business.

1980

The company ventured into household appliance manufacturing by commencing production of electric fans.

1990

An agreement with Toshiba was signed, leading to the development and production of split-style air conditioners.

1998

Joint ventures were formed with Toshiba-Carrier and Chongqing General for air conditioning product manufacturing.

2004

Acquisition of the Macro-Toshiba compressor factory, later renamed GMCC, marked the company's entry into the air conditioning compressor business.

2011-12

Joint venture partnerships were established with Carrier in Latin America and India, enhancing manufacturing and distribution channels.

2016-17

Major acquisitions included Toshiba's home appliances business, KUKA, a German robotics company, and Eureka, solidifying the company's position in the Fortune Global 500.

2022 - PRESENT

Midea emerged as a global powerhouse boasting over 190,000+ employees, operations in more than 200 countries and regions, exceeding 57.5 billion USD, 2 global Innovation Centers and 60 production bases.

ABOUT CMI SUPA MANUFACTURING UNIT


Since 2012, Carrier Midea India has earned the trust of customers by delivering advanced, reliable product solutions. Our CMI manufacturing facility in Supa, Maharashtra, plays a key role in producing world-class products using state-of-the-art, energy-efficient technologies. All our products are developed in compliance with Quality Control Orders mandated by BIS and ISI to guarantee consistent quality, improved value, and efficiency - thereby offering customers higher reliability. Moreover, we only use R32 refrigerant in our products to support long-term environmental sustainability.

Licence no. CM/L- 7500211007



UNDERSTANDING ISEER

THE MODERN METRIC OF AC EFFICIENCY

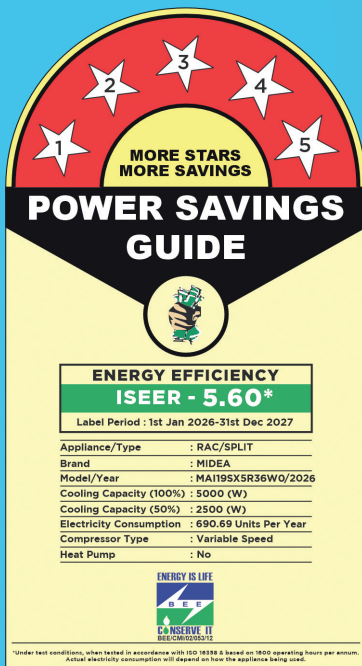

ISEER, or Indian Seasonal Energy Efficiency Ratio, a standard set by BEE, determines AC efficiency as per the seasonal and climate changes in India. Inverter ACs are said to provide better efficiency than Fixed Speed ACs as they can easily operate according to the room conditions. It is advisable to always check ISEER ratings along with star ratings when comparing AC models.

2026 NEW BEE ENERGY REQUIREMENT

SPLIT AC

5 Star = 5.60

4 Star = 5.0~5.59

3 Star = 4.3~4.99

2 Star = 3.8~4.29

1 Star = 3.5~3.79

1st Jan'26-31st Dec'27

WRAC

5 Star ≥ 3.7

4 Star = 3.5~3.69

3 Star = 3.30~3.49

2 Star = 3.10~3.29

1 Star = 2.90~3.09

1st Jan'26-31st Dec'29

KNOW YOUR COOLING MODES

UNDERSTANDING COOLING CAPACITY AS PER YOUR NEED/WEATHER

6N1(5 Star)	L1	L2	L3	L4	L5	Insta Cool
1.0 T	0.5 T	0.7 T	0.8 T	1.0 T	1.1 T	1.2 T (4080 W)
1.2 T	0.6 T	0.85 T	1.0 T	1.35 T	1.4 T	1.55 T (5400 W)
1.5 T	0.8 T	1.0 T	1.25 T	1.4 T	1.55 T	1.7 T (5760 W)
2.0 T	0.9 T	1.25 T	1.5 T	1.7 T	1.8 T	1.9 T (6580 W)

6N1(3 Star)	L1	L2	L3	L4	L5	Insta Cool
1.0 T	0.5 T	0.7 T	0.8 T	1.0 T	1.1 T	1.2 T (4080 W)
1.4 T	0.6 T	0.85 T	1.0 T	1.35 T	1.4 T	1.55 T (5400 W)
1.5 T	0.8 T	1.0 T	1.25 T	1.4 T	1.55 T	1.7 T (5760 W)
2.0 T	0.9 T	1.25 T	1.5 T	1.7 T	1.75 T	1.9 T (6900 W)

Insta Cool time limit: No limit



The values and examples presented are indicative and may vary based on individual circumstances. T connotes Tonnage category. T&C apply.

AI MEETS WORLD-CLASS COOLING


Midea brings world-class innovation powered by advanced AI-driven technology. Our smart air conditioners adapt to user preferences to deliver personalized comfort while optimizing energy efficiency and performance. Features like Over-the-Air software upgrades, Geofencing, Smart Sleep and Comfort Mode ensure intelligent cooling that fits seamlessly into everyday routines.

With AC Self Check and secure OTP-based installation setup, Midea guarantees reliable performance and complete peace of mind. Smart energy mapping helps users manage consumption efficiently, making our air conditioners lighter on the pocket and kinder to the planet.




STEP 1

To register your complaint, tap on the top three dots.

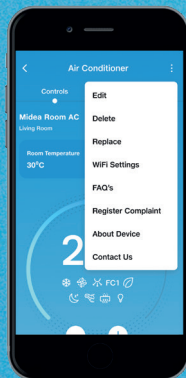


STEP 2

Tap on 'Register Complaint'.

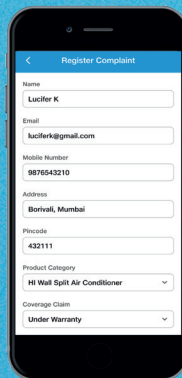

STEP 3

Fill in the details and send.

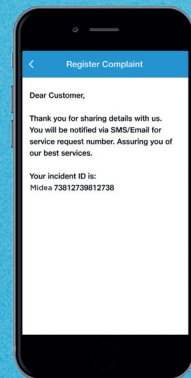

STEP 4

You will get a notification on the status of your service request.

APP-BASED FEATURES



*Over-the-Air
Software
Upgrade



*Geofencing



*AC Self Check



*Comfort Mode



*3D Sleep



works with the
Google Assistant



*Wi-Fi (AI+) V2



Wi-Fi (AI+)



RAC Wi-Fi

- Geofencing
- Energy Management
- CRM


Scan the QR code to download the app



GET IT ON
Google Play



Download on the
App Store

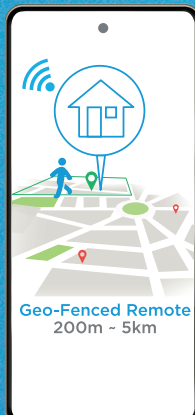

Geo-Fenced Remote
200m - 5km

Wi-Fi CMI V1



Wi-Fi CMI


Scan the QR code to download the app



GET IT ON
Google Play



Download on the
App Store

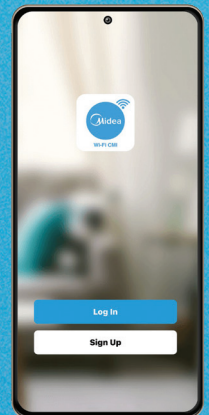


BUILT TO DELIVER EXCEPTIONAL PERFORMANCE

HEAVY DUTY


(100% COOLING CAPACITY @43°C)

Built with powerful compressors, larger evaporator, durable components and higher cooling capacity, Midea AC ensures reliable performance, quicker cooling, and greater heat resistance consistently for a longer lifespan.

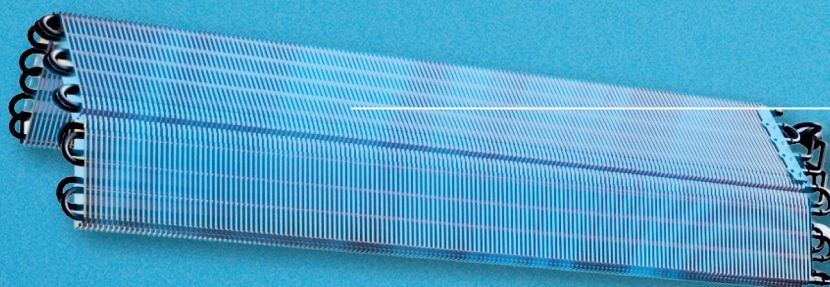


Evaporator

Larger evaporator for higher heat exchange efficiency.

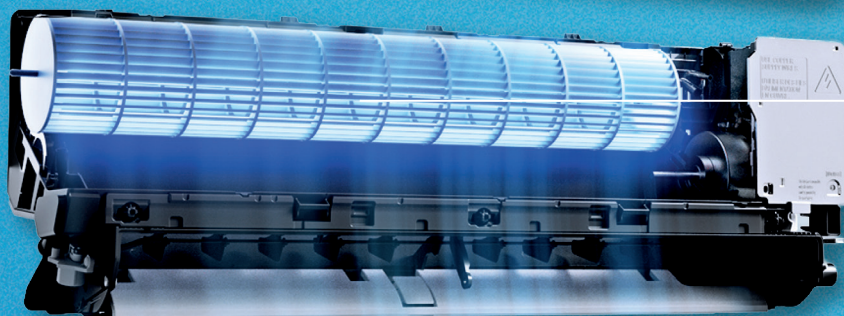

Wind Wheel

Larger wind wheel brings a stronger cooling experience.




Rotating Deflector

Larger swing angle for longer airflow distance.



Outdoor Unit

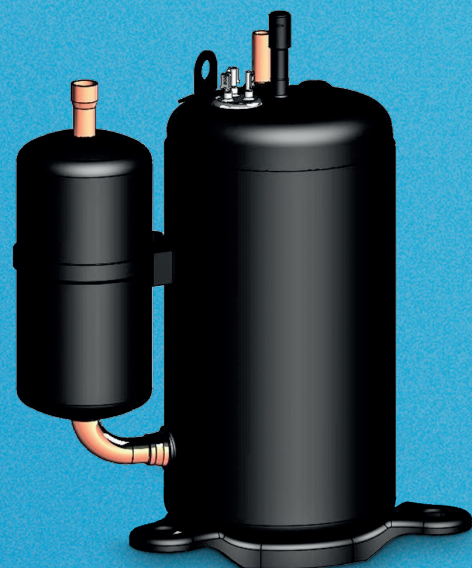

Compressor

AUTO CLEAN (DEFROST CLEAN)

Midea Inverter AC has been upgraded from water washing (20 min) to frost cleaning (42 min), which removes more dust and bacteria, keeping the AC clean and performing well.


 Total
42* min



1 CONDENSED WATER

Cooling mode & Mid speed wind.

10 min

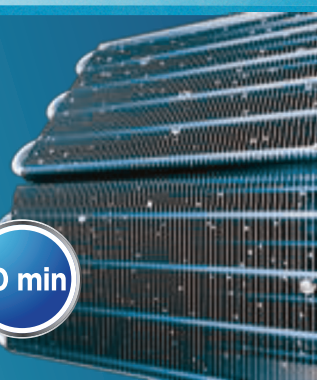

2 FROSTING

The temperature cools rapidly ($T \leq 10^{\circ}\text{C}$).


10 min



3 WASHING

Defrosts into water to remove dust and dirt.


20 min

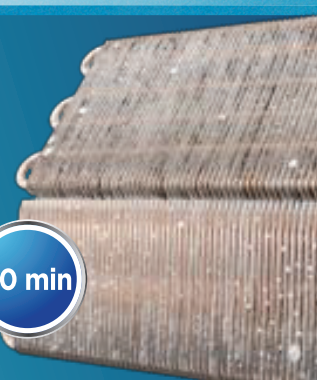

4 DRYING

Dries the evaporator to prevent mold growth.



2 min

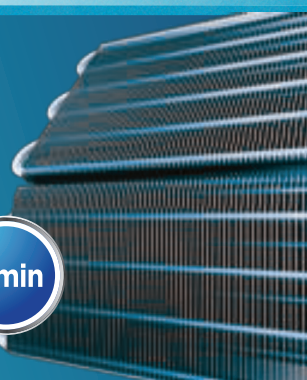

*The total cleaning time will vary according to the actual operating environment, and the longest time is 42 minutes for cooling model only.

INSTALLER-FRIENDLY DESIGN PULL-DOWN STRUCTURE


The installer-friendly pull-down structure is engineered to make installation quicker, easier, and more accurate. With easy access to electrical and internal components, installers can work comfortably and efficiently, reducing installation time while ensuring a clean, reliable setup.

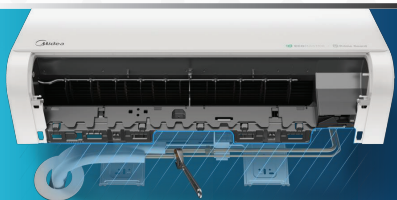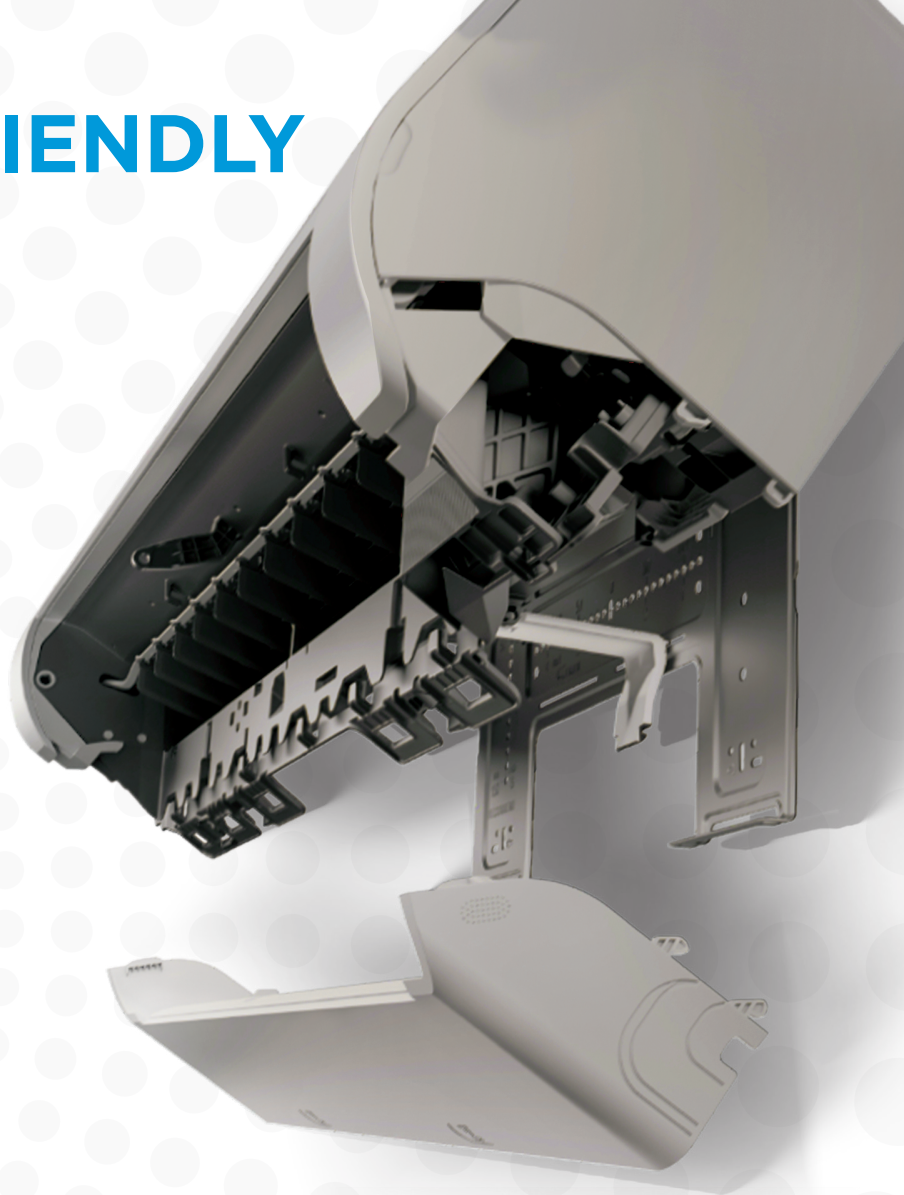


Upgraded pull-down structure design. Easy to install, maintain, and clean.



Easy access to wiring without fully opening the unit.

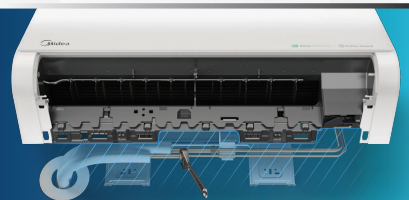


Less dismantling, reducing chances of damage.

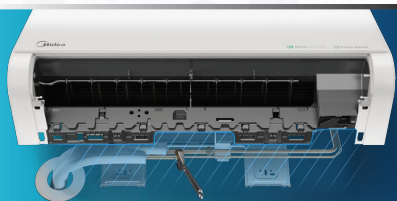

Faster installation time, especially in tight spaces.



Simpler maintenance & servicing later on.

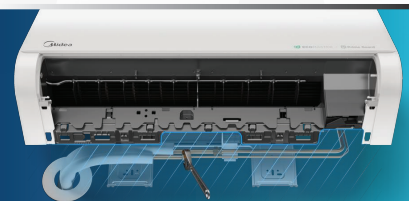

Reduced installation errors since connections are clearly visible.



MASTER AI SAVING BETTER COMFORT LIVING



1. Bigger Than Bigger, Master Giga Data*

Powered by the industry's largest AC operational data, AI ECOMASTER can deliver much faster and more accurate comfort with energy saving strategies, far ahead of conventional inverter technologies.

Master World's Largest AC
Inverter AC Production

41 million



Master Industry's Largest AC
AC Operational Data

100 billion



Up to
25%[#]

Extra saving
compared
to energy usage
before engaging AI



[#]T&C apply.

*Data points based on Midea Global.

2. Precise Temperature Control

Maintains the desired room temperature accurately and consistently with minimal fluctuations. This feature uses our advance inverter technology and sensors that reduce wear-and-tear of compressors and monitors room conditions in real time.

Predict indoor and outdoor heat loads for
faster room temperature optimization

AI-driven precise control to handle
daytime temperature fluctuations

Nighttime predictions ensure accurate
control to avoid excessive cooling

^{*}AI ECOMASTER function only applicable to Santis NXG & Santis ACE inverter models. AI ECOMASTER cloud-based working is applicable for Wi-Fi model only.




Prime Guard
HYDROPHILIC BLUE COIL

BUILT TO LAST

The hydrophilic blue coated fin boasts great stability against corrosion.


EXTREME DURABILITY

Verified by tested standards.

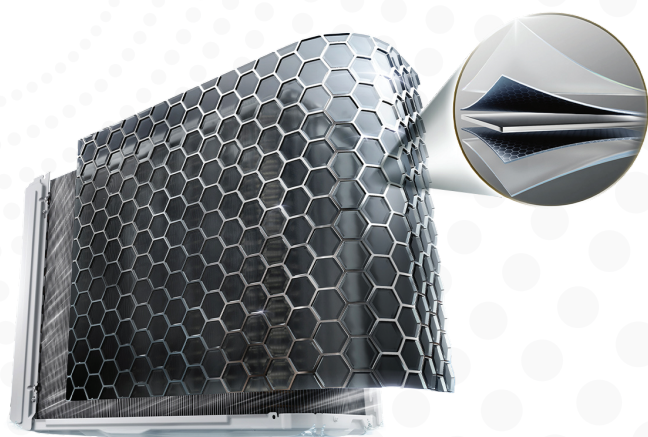

MIDEA EXCLUSIVE ANTI-AGING TECHNOLOGY TEST

After 240 hours UV test
and 72 hours neutral salt (fog) test

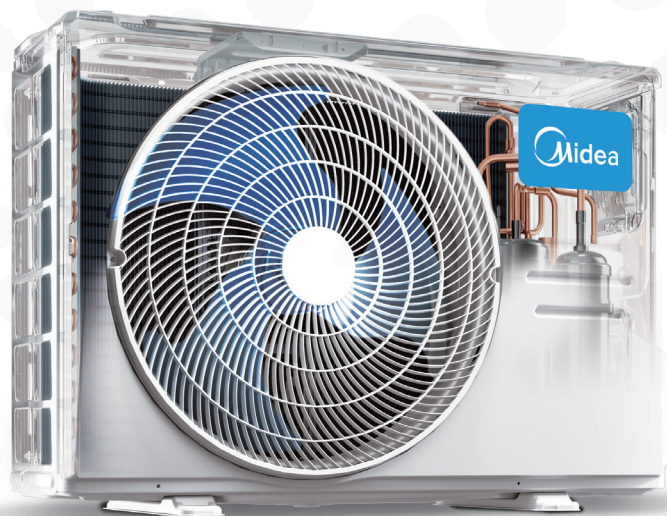

LONG-LASTING CORROSION RESISTANCE

Depends on the industrial environment
with salt contamination.





MIDEA SANTIS NXG V PRO

LEVEL UP TO INTELLIGENT COMFORT WITH THE
AI CONDITIONER



Available in:



3 Star: 1/1.5/2.0 T



5 Star: 1.0/1.5/2.0 T

*AI ECOMASTER cloud-based working is applicable for Wi-Fi model only.

SANTIS NXG V PRO RYL Wi-Fi



5 STAR INVERTER AC
Available in 1.0, 1.5
& 2.0 T categories

Experience smart, efficient cooling that adapts in real time for optimal savings and comfort with SANTIS NXG V PRO RYL Wi-Fi. Now enhanced with Smart Voice Control, it also features Responsive Display, Prime Guard, and AI ECOMASTER delivering efficient cooling, lasting reliability, and effortless comfort at your command.



AI-POWERED FEATURES



AI ECOMASTER

AI ECOMASTER harnesses Midea's AI Energy Saving technology, using smart data-driven control to optimize comfort while maximizing energy efficiency.



SMART VOICE CONTROL

Intuitive, smart voice response with real-time visual feedback.



RESPONSIVE DISPLAY

Intuitive, real-time visual feedback through an LED loop that simplifies control and enhances user interaction.



6-IN-1 GEAR CONTROL

Smart cooling and energy-saving modes with real-time power and speed indication.



OTA

Supports Over-The-Air software upgrades.



Prime Guard
(Hydrophilic Blue Coil)*



Wi-Fi 2.0 (AI+)



4-Way Swing



PM2.5 Filter



Air Direction Control



Refrigerant Leakage Detector



3D Sleep



Auto-on/off Timer



Follow Me



High Ambient Working



Stabilizer Free
even at 48°C,
135-280 V



Auto Cleaner
(Defrost Clean)



Installer-Friendly PDS
(Pull-down Structure)



Heavy Duty
(100% rated capacity @43°C)



kW Display



MAI12SX5R36W0



MAI19SX5R36W0



MAI24SX5R36W0

TONNAGE CATEGORY		1.0 T	1.5 T	2.0 T
Maximum Cooling Capacity Range (W)		4080	5400	6580
Rated Capacity - Full/Half (W) Load		3400/1700	5000/2500	6000/3000
Performance	Annual Power Consumption	470.04	690.69	821.86
	ISEER Value (W/W)	5.6	5.6	5.65
	Valve Size (inch)	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

SANTIS NXG V PRO DLX


3 STAR INVERTER AC
Available in 1.0, 1.5 & 2.0 T
categories

Experience smarter cooling with SANTIS NXG V PRO DLX. Powered by AI ECOMASTER, it optimizes energy usage for greater savings. With Responsive Display, Smart Voice Control, and 6-in-1 Gear Control, comfort is always easy and efficient.



AI-POWERED FEATURES



AI ECOMASTER

AI ECOMASTER harnesses Midea's AI Energy Saving technology, using smart data-driven control to optimize comfort while maximizing energy efficiency.



SMART VOICE CONTROL

Intuitive, smart voice response with real-time visual feedback.



RESPONSIVE DISPLAY

Intuitive, real-time visual feedback through an LED loop that simplifies control and enhances user interaction.



6-IN-1 GEAR CONTROL

Smart cooling and energy-saving modes with real-time power and speed indication.



Prime Guard
(Hydrophilic Blue Coil)*



kW Display



4-Way Swing



PM2.5 Filter



Air Direction Control



Refrigerant Leakage Detector



Sleep Mode



Auto-on/off Timer



Follow Me



High Ambient Working



Stabilizer Free even at 48°C, 135-280 V



Auto Cleaner (Defrost Clean)



Installer-Friendly PDS (Pulldown Structure)



Heavy Duty (100% rated capacity @43°C)



MAI12SX3R36FO



MAI18SX3R36FO



MAI19SX3R36FO



MAI24SX3R36FO

TONNAGE CATEGORY		1.0 T	1.5 T	1.5 T	2.0 T
Maximum Cooling Capacity Range (W)		4080	5400	5760	6580
Rated Capacity - Full/Half (W) Load		3450/1725	4850/2425	5050/2525	6000/3000
Performance	Annual Power Consumption	613.7	853.92	887.80	1068.29
	ISEER Value (W/W)	4.35	4.40	4.40	4.35
	Valve Size (inch)	3/8" x 1/4"	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

SANTIS ACE RYL Wi-Fi


5 STAR INVERTER AC
Available in 1.0, 1.5 & 2.0 T
category

Advanced Customer Experience (ACE) meets smarter cooling with SANTIS ACE RYL's AI ECOMASTER. Featuring Wi-Fi connectivity, Prime Guard protection, and 6-in-1 Gear Control, it delivers precise, durable, app-enabled comfort at your fingertips.



AI ECOMASTER

AI ECOMASTER harnesses Midea's AI Energy Saving technology, using smart data-driven control to optimize comfort while maximizing energy efficiency.



PRIME GUARD HYDROPHILIC BLUE COIL[#]

Prime Guard, featuring Green Armor with Blue Fin, offers superior corrosion and oxidation resistance, ensures long-lasting performance, and effectively prevents bacterial growth.



Wi-Fi 2.0 (AI+)

AI-powered Wi-Fi AC that intelligently optimizes cooling, comes with Geofencing for automatic adjustments within a defined range, and provides seamless app-based CRM support.



6-IN-1 GEAR CONTROL

Smart cooling and energy-saving modes with real-time power and speed indication.



PM2.5 Filter



kW Display



4-Way Swing



Auto-on/off
Timer



Air Direction
Control



Refrigerant
Leakage Detector



3D Sleep



Auto Cleaner
(Defrost Clean)



Follow Me



High Ambient
Working



Stabilizer Free
even at 48°C,
135-280 V



Installer-Friendly
PDS (Pulldown
Structure)



Heavy Duty
(100% rated
capacity @43°C)



MAI12SA5R36W0



MAI19SA5R36W0



MAI24SA5R36W0

TONNAGE CATEGORY		1.0 T	1.5 T	2.0 T
Maximum Cooling Capacity Range (W)		4080	5760	6580
Rated Capacity - Full/Half (W) Load		3400/1700	5000/2500	6000/3000
Performance	Annual Power Consumption	470.04	690.69	821.86
	ISEER Value (W/W)	5.60	5.60	5.65
	Valve Size (inch)	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

*T&C apply. T connotes tonnage category. [#]2.0 T model Bluefin applicable for Evaporator only.

SANTIS ACE DLX


3 STAR INVERTER AC
Available in 1.0, 1.5 & 2.0 T
categories

Advanced Customer Experience (ACE) defines the SANTIS ACE DLX, delivering intelligent, energy-efficient cooling with AI ECOMASTER. With Prime Guard protection and 6-in-1 Gear Control, it ensures long-lasting reliability and precise everyday comfort.



AI ECOMASTER

AI ECOMASTER harnesses Midea's AI Energy Saving technology, using smart data-driven control to optimize comfort while maximizing energy efficiency.



PRIME GUARD HYDROPHILIC BLUE COIL#

Prime Guard, featuring Green Armor with Blue Fin, offers superior corrosion and oxidation resistance, ensures long-lasting performance, and effectively prevents bacterial growth.



PM2.5 FILTER

Designed with PM2.5 and HD filters to efficiently trap dust and fine particles, and keep your indoor air fresh and pure.



6-IN-1 GEAR CONTROL

Smart cooling and energy-saving modes with real-time power and speed indication.



Installer Friendly PDS (Pulldown Structure)



kW Display



4-Way Swing



Auto-on/off Timer



Air Direction Control



Refrigerant Leakage Detector



Sleep Mode



Auto Cleaner (Defrost Clean)



Follow Me



High Ambient Working



Stabilizer Free even at 48°C, 135-280 V



Heavy Duty (100% rated capacity @43°C)



MAI12SA3R36FO



MAI18SA3R36FO



MAI19SA3R36FO



MAI24SA3R36FO

	TONNAGE CATEGORY	1.0 T	1.5 T	1.5 T	2.0 T
	Maximum Cooling Capacity Range (W)	4080	5400	5760	6580
	Rated Capacity - Full/Half (W) Load	3450/1725	4850/2425	5050/2525	6000/3000
Performance	Annual Power Consumption	613.7	853.92	887.80	1068.29
	ISEER Value (W/W)	4.35	4.40	4.40	4.35
	Valve Size (inch)	3/8" x 1/4"	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

*T&C apply. T connotes tonnage category. #2.0 T model Bluefin applicable for Evaporator only.

SANTIS MAX RYL Wi-Fi



5 STAR INVERTER AC
Available in 1.0, 1.5 & 2.0 T
categories

Make everyday comfort efficient and convenient with SANTIS MAX RYL's built-in Wi-Fi 1.0. With Prime Guard protection and 6-in-1 Gear Control, it offers reliable performance, flexible cooling levels and dependable operation for long-term use.



PRIME GUARD HYDROPHILIC BLUE COIL#

Prime Guard, featuring Green Armor with Blue Fin, offers superior corrosion and oxidation resistance, ensures long-lasting performance, and effectively prevents bacterial growth.



Wi-Fi* 1.0*

Control your AC seamlessly using Google Home, Siri, or other smart assistants.



PM2.5 FILTER

Designed with PM2.5 and HD filters to efficiently trap dust and fine particles, and keep your indoor air fresh and pure.



6-IN-1 GEAR CONTROL

Smart cooling and energy-saving modes with real-time power and speed indication.



**Air Direction
Control**



**High Ambient
Working**



**Stabilizer Free
even at 48°C,
135~280 V**



Follow Me



**Auto-on/off
Timer**



**Refrigerant
Leakage Detector**



Sleep Mode



**Auto Cleaner
(Defrost Clean)**



**Heavy Duty
(100% rated
capacity @43°C)**



MAI12SR5R36W0



MAI18SR5R36W0



MAI24SR5R36W0

TONNAGE CATEGORY		1.0 T	1.5 T	2.0 T
Performance	Maximum Cooling Capacity Range (W)	4080	5400	6580
	Rated Capacity - Full/Half (W) Load	3400/1700	4800/2400	6000/3000
	Annual Power Consumption	470.04	663.31	829.89
	ISEER Value (W/W)	5.60	5.60	5.60
	Valve Size (inch)	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

SANTIS MAX RYL


5 STAR INVERTER AC
Available in 1.0, 1.5 & 2.0 T
categories

The SANTIS MAX RYL provides efficient cooling with dependable performance for everyday comfort. Equipped with Prime Guard protection and 6-in-1 Gear Control, it offers flexible cooling levels and long-lasting reliability.



PRIME GUARD HYDROPHILIC BLUE COIL#

Prime Guard, featuring Green Armor with Blue Fin, offers superior corrosion and oxidation resistance, ensures long-lasting performance, and effectively prevents bacterial growth.



HIGH AMBIENT WORKING

Works in high temperature up to 52°C.



PM2.5 FILTER

Designed with PM2.5 and HD filters to efficiently trap dust and fine particles, and keep your indoor air fresh and pure.



6-IN-1 GEAR CONTROL

Smart cooling and energy-saving modes with real-time power and speed indication.



**Air Direction
Control**



**Stabilizer Free
even at 48°C,
135~280 V**



**Auto-on/off
Timer**



Follow Me



**Auto Cleaner
(Defrost Clean)**



**Refrigerant
Leakage Detector**



Sleep Mode



**Auto
Swing**



**Heavy Duty
(100% rated
capacity @43°C)**



MAI12SR5R36FO



MAI18SR5R36FO



MAI24SR5R36FO

	TONNAGE CATEGORY	1.0 T	1.5 T	2.0 T
	Maximum Cooling Capacity Range (W)	4080	5400	6580
	Rated Capacity - Full/Half (W) Load	3400/1700	4800/2400	6000/3000
Performance	Annual Power Consumption	470.04	663.31	829.89
	ISEER Value (W/W)	5.60	5.60	5.60
	Valve Size (inch)	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

SANTIS MAX DLX Wi-Fi


3 STAR INVERTER AC
Available in 1.0, 1.5 & 2.0 T
categories

Offers dependable cooling with Wi-Fi 1.0, enabling effortless control and consistent comfort. The Prime Guard protection and 6-in-1 Gear Control in this SANTIS range assures lasting performance and adaptable cooling.



PRIME GUARD HYDROPHILIC BLUE COIL#

Prime Guard, featuring Green Armor with Blue Fin, offers superior corrosion and oxidation resistance, ensures long-lasting performance, and effectively prevents bacterial growth.



Wi-Fi* 1.0*

Control your AC seamlessly using Google Home, Siri, or other smart assistants.



PM2.5 FILTER

Designed with PM2.5 and HD filters to efficiently trap dust and fine particles, and keep your indoor air fresh and pure.



6-IN-1 GEAR CONTROL

Smart cooling and energy-saving modes with real-time power and speed indication.



**Auto Cleaner
(Defrost Clean)**



**Stabilizer Free
even at 48°C,
135-280 V**



**High Ambient
Working**



Follow Me



**Air Direction
Control**



**Refrigerant
Leakage Detector**



Sleep Mode



**Auto
Swing**



MAI12SD3R36W0



MAI18SD3R36W0



MAI19SD3R36W0



MAI24SD3R36W0

	TONNAGE CATEGORY	1.0 T	1.5 T	1.5 T	2.0 T
	Maximum Cooling Capacity Range (W)	4080	5400	5760	6580
	Rated Capacity - Full/Half (W) Load	3400/1700	4800/2400	5050/2525	6000/3000
Performance	Annual Power Consumption	604.99	854.39	887.80	1068.29
	ISEER Value (W/W)	4.35	4.35	4.40	4.35
	Valve Size (inch)	3/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

SANTIS MAX DLX



3 STAR INVERTER AC
Available in 1.0, 1.5 & 2.0 T
categories

With the SANTIS MAX DLX, enjoy efficient cooling with reliable performance, supported by Prime Guard protection, 6-in-1 Gear Control and much more.



PRIME GUARD HYDROPHILIC BLUE COIL#

Prime Guard, featuring Green Armor with Blue Fin, offers superior corrosion and oxidation resistance, ensures long-lasting performance, and effectively prevents bacterial growth.



HIGH AMBIENT WORKING

Works in high temperature up to 52°C.



PM2.5 FILTER

Designed with PM2.5 and HD filters to efficiently trap dust and fine particles, and keep your indoor air fresh and pure.



6-IN-1 GEAR CONTROL

Smart cooling and energy-saving modes with real-time power and speed indication.



**Air Direction
Control**



**Stabilizer Free
even at 48°C,
135~280 V**



Follow Me



**Auto Cleaner
(Defrost Clean)**



**Refrigerant
Leakage Detector**



Sleep Mode



**Auto
Swing**



MAI12SD3R36FO



MAI18SD3R36FO



MAI19SD3R36FO



MAI24SD3R36FO

	TONNAGE CATEGORY	1.0 T	1.5 T	1.5 T	2.0 T
	Maximum Cooling Capacity Range (W)	4080	5400	5760	6580
	Rated Capacity - Full/Half (W) Load	3400/1700	4800/2400	5050/2525	6000/3000
Performance	Annual Power Consumption	604.99	854.39	887.80	1068.29
	ISEER Value (W/W)	4.35	4.35	4.40	4.35
	Valve Size (inch)	3/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

SANTIS MAX CLS

2 & 3 STAR FIXED SPEED AC
Available in 2 star - 1.0, 1.5 & 2.0 T
3 star - 1.5 T categories

This SANTIS AC is designed to elevate your comfort by cooling your home faster and delivering instant relief. Moreover, it offers real-time refrigerant leakage alerts through smart home integration.



PRIME GUARD HYDROPHILIC BLUE COIL#

Prime Guard, featuring Green Armor with Blue Fin, offers superior corrosion and oxidation resistance, ensures long-lasting performance, and effectively prevents bacterial growth.



HIGH AMBIENT WORKING

Works in high temperature up to 52°C.



PM2.5 FILTER

Designed with PM2.5 and HD filters to efficiently trap dust and fine particles, and keep your indoor air fresh and pure.



AUTO CLEANER (DEFROST CLEAN)

AC disinfects and cleans the indoor units on its own.



Intelligent CRF Alert



Turbo Mode



Refrigerant Leakage Detector



Sleep Mode



Auto Mode



Hidden Display



Dry Mode



Air Direction Control



MAS13SM2R36FO



MAS19SM2R36FO



MAS19SM2R36F1



MAS18SM3R36FO



MAS24SM2R36FO

	TONNAGE CATEGORY	1.0 T	1.5 T	1.5 T	1.5 T	2.0 T
	Rated Capacity - Full (W) Load	3600	5200	5200	5000	6050
Performance	Annual Power Consumption	727.66	1045.04	1045.04	890.22	1215.35
	ISEER Value (W/W)	3.83	3.85	3.85	4.35	3.85
	Valve Size (inch)	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

SANTIS MEGA


4 STAR INVERTER AC
Available in 3 T category

Take charge of your cooling with SANTIS MEGA. With built-in security lock, refrigerant leak detection, and easy Gear Control, comfort at home is now simpler and more reliable.



HIDDEN DISPLAY

Get a clean minimal look on your AC unit.



REFRIGERANT LEAKAGE DETECTOR

Get prompt alerts on refrigerant leakages with smart detection systems.



AUTO CLEANER (DEFROST CLEAN)

AC disinfects and cleans the indoor units on its own.



HIGH AMBIENT WORKING

Works in high temperature up to 52°C.



Security Lock



Air Direction Control



Intelligent CRF Alert



Dry Mode



Auto Swing



Auto Mode



Follow Me



Sleep Mode



6-in-1 Gear Control



MAI36SM4R35F0

TONNAGE CATEGORY		3.0 T
Performance	Maximum Cooling Capacity Range (W)	11500
	Rated Capacity - Full/Half (W) Load	10560/5280
	Annual Power Consumption	2182.97
	ISEER Value (W/W)	3.74
	Valve Size (inch)	5/8" x 3/8"

MARVEL CLS



 2 STAR FIXED SPEED AC

 Available in 2 star - 1 T category

Experience fast, uniform cooling that keeps you comfortable all day. High airflow and Turbo Mode work together to spread cooling evenly, delivering multi-dimensional comfort with the MARVEL CLS.



HIGH AMBIENT WORKING

Works in high temperature up to 50°C.



AUTO SWING

Auto Swing spreads cool air evenly across the room for faster, uniform cooling.



TURBO MODE

Switch to Turbo Mode, feel the temperature go down for effective and fast cooling.



TEMPERATURE DISPLAY

Get a clean minimal look on your AC unit.



Dust Filter



Dry Mode



Auto Restart



Sleep Mode



Auto Fan Speed



MAW12MR2R36F1

TONNAGE CATEGORY		1.0 T
Performance	Rated Capacity - Full (W) Load	3100
	Annual Power Consumption	760.17
	ISEER Value (W/W)V	3.16

MARVEL CLS



3 STAR FIXED SPEED AC
Available in 3 star - 1.5 T category

The MARVEL CLS delivers powerful, efficient cooling that keeps your space comfortable all day. With High Airflow and Turbo Mode, it spreads cool air evenly across the room, so comfort comes easy and stays longer.



HIGH AMBIENT WORKING

Works in high temperature up to 52°C.



AUTO SWING

Auto Swing spreads cool air evenly across the room for faster, uniform cooling.



TURBO MODE

Switch to Turbo Mode, feel the temperature go down for effective and fast cooling.



TEMPERATURE DISPLAY

Get a clean minimal look on your AC unit.



Dust Filter



Dry Mode



Auto Restart



Sleep Mode



Auto Fan Speed



MAW18MR3R36F0

TONNAGE CATEGORY		1.0 T
Performance	Rated Capacity - Full (W) Load	4900
	Annual Power Consumption	1131.74
	ISEER Value (W/W)V	3.35

MARVEL RYL


5 STAR INVERTER AC
Available in 1.5 TR category

The MARVEL RYL offers strong, efficient cooling that brings everyday comfort with ease. Loaded with High Airflow and Turbo Mode, it ensures uniform cooling across the room for long-lasting comfort.



HIGH AMBIENT WORKING

Works in high temperature up to 52°C.



AUTO SWING

Auto Swing spreads cool air evenly across the room for faster, uniform cooling.



TURBO MODE

Switch to Turbo Mode, feel the temperature go down for effective and fast cooling.



TEMPERATURE DISPLAY

Get a clean minimal look on your AC unit.



Dust Filter



Dry Mode



Auto Restart



Sleep Mode



Auto Fan Speed



MIW19MR5R36FO

	TONNAGE CATEGORY	1.5 TR
	Rated Capacity - Full/Half (W) Load	5100/2550
Performance	Annual Power Consumption	1053.94
	ISEER Value (W/W)	3.75

SPLIT INVERTER AIR CONDITIONERS

			SANTIS MAX DLX	SANTIS MAX DLX	SANTIS MAX DLX	SANTIS MAX DLX	SANTIS MAX DLX Wi-Fi	
	MODEL NO.		MAI12SD3R36F0	MAI18SD3R36F0	MAI19SD3R36F0	MAI24SD3R36F0	MAI12SD3R36W0	
GENERAL	TONNAGE CATEGORY	T	1.0	1.5	1.5	2.0	1.0	
	MAXIMUM CAPACITY RANGE	Watt	4080	5400	5760	6580	4080	
	FULL LOAD CAPACITY (100% Load Rated)	Watt	3400	4800	5050	6000	3400	
	HALF LOAD CAPACITY (50%)	Watt	1700	2400	2525	3000	1700	
	FULL LOAD POWER INPUT* (100% Load Rated)	Watt	985	1435	1480	1780	985	
	HALF LOAD POWER INPUT*(50% Load)	Watt	365	502	525	632	365	
	ANNUAL POWER CONSUMPTION	kWh	604.99	854.39	887.80	1068.29	604.99	
	LABEL PERIOD		"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	
	BEE STAR RATING***		3 Star	3 Star	3 Star	3 Star	3 Star	
	ISEER VALUE	W/W	4.35	4.35	4.40	4.35	4.35	
	RATED POWER SUPPLY	V-Ph-Hz	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	
	RATED AMP	Amp	4.3	6.3	6.5	7.8	4.3	
	NET WEIGHT	kg (IDU/ODU)	10.1 / 21	10.1 / 21	10.1 / 25.5	12.5 / 28	10.1 / 21	
	AIR FLOW RATE	CFM	380	580	580	700	380	
	INDOOR NOISE LEVEL (H/M/L)	db	40/38/32	42/40/37	42/40/37	46/44/39	40/38/32	
	FAN MOTOR (INDOOR)	No. of speeds	4	4	4	4	4	
	WITH CONNECTING KIT PIPE		YES	YES	YES	YES	YES	
	OVERALL SIZE	VALVE SIZE	inch	3/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	3/8" x 1/4"
MOISTURE REMOVAL RATE		kg/h	1.2	2.0	2.0	2.4	1.2	
INDOOR UNIT (HEIGHT)		mm	275	275	275	315	275	
INDOOR UNIT (WIDTH)		mm	800	940	940	1045	800	
INDOOR UNIT (DEPTH)		mm	188	205	205	235	188	
OUTDOOR UNIT (HEIGHT)		mm	480	480	540	540	480	
OUTDOOR UNIT (WIDTH)		mm	720	720	790	790	720	
FILTERS	OUTDOOR UNIT (DEPTH-with Grill)	mm	270	270	270	270	270	
	CONVENTIONAL HD FILTER		YES	YES	YES	YES	YES	
	TOP HD FILTER		NA	NA	NA	NA	NA	
	PM2.5 MICRON FILTER(3M Brand)		NA	NA	NA	NA	NA	
	PM2.5 MICRON FILTER		YES	YES	YES	YES	YES	
	AG+ NANO FILTER		NA	NA	NA	NA	NA	
SMART FEATURES	(AVG) ANTIVIRAL GUARD COATED FILTER		NA	NA	NA	NA	NA	
	REFRIGERANT		R32	R32	R32	R32	R32	
	INVERTER TECHNOLOGY - QUATTRO		YES	YES	YES	YES	YES	
	AIR DIRECTION CONTROL		YES	YES	YES	YES	YES	
	SECURITY LOCK		YES	YES	YES	YES	YES	
	IDU TEMP DISPLAY		Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	
	REMOTE CONTROL TYPE		LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	
	REMOTE BACKLIT (1.0)		YES	YES	YES	YES	YES	
	NEW REMOTE BACKLIT (2.0)		NA	NA	NA	NA	NA	
	AUTO-OFF TIMER		YES	YES	YES	YES	YES	
	AUTO-ON TIMER		YES	YES	YES	YES	YES	
	SLEEP MODE		YES	YES	YES	YES	YES	
	REFRIGERANT LEAKAGE DETECTOR		YES	YES	YES	YES	YES	
	LOUVER POSITION MEMORY		YES	YES	YES	YES	YES	
	DRY MODE		YES	YES	YES	YES	YES	
	AUTO FAN SPEED		YES	YES	YES	YES	YES	
	INTELLIGENT CRF ALERT		YES	YES	YES	YES	YES	
	AUTO SWING		YES	YES	YES	YES	YES	
	AUTO CLEANER (Defrost clean)		YES	YES	YES	YES	YES	
	FOLLOW ME		YES	YES	YES	YES	YES	
	AUTO MODE		YES	YES	YES	YES	YES	
	AUTO RESTART		YES	YES	YES	YES	YES	
	DOUBLE DRAIN (EASY INSTALLATION)		YES	YES	YES	YES	YES	
	EASY INSTALLATION - SERVICE SUPPORT BRACKET IDU		NA	NA	NA	NA	NA	
	GEAR (6-IN-1)		YES	YES	YES	YES	YES	
	INSTA COOL/TURBO		YES	YES	YES	YES	YES	
	MY MODE (Favorite mode)		YES	YES	YES	YES	YES	
	TEMP DISPLAY ON/OFF		YES	YES	YES	YES	YES	
	SILENT		NA	NA	NA	NA	NA	
	4-WAY SWING		NA	NA	NA	NA	NA	
	PRIME GUARD		ANTI-CORROSION COATING (BLUE)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
			HYDROPHILIC BLUE COIL	Evap & Cond both	Evap & Cond both	Evap & Cond both	Evap & Cond both	Evap & Cond both
	HIGH-AMBIENT WORKING			52°C	52°C	52°C	52°C	52°C
	HEAVY DUTY (100% RATED CAPACITY @43°C)			NA	NA	NA	NA	NA
	STABILIZER-FREE OPERATION (Even @48°C, 135-280 V)			YES	YES	YES	YES	YES
	kW/SED DISPLAY			NA	NA	NA	NA	NA
	PRECISE TEMP CONTROL			NA	NA	NA	NA	NA
	ANTI MOLD			YES	YES	YES	YES	YES
INSTALLER-FRIENDLY PULL DOWN STRUCTURE			NA	NA	NA	NA	NA	
Wi-Fi (Ver 1.0)			NA	NA	NA	NA	YES	
Wi-Fi (Ver 2.0 AI+)			NA	NA	NA	NA	NA	
OTA SOFTWARE UPDATE (With Wi-Fi App)			NA	NA	NA	NA	NA	
GEOFENCING (With Wi-Fi App)			NA	NA	NA	NA	NA	
GOOGLE ACTION			NA	NA	NA	NA	YES	
AMAZON ALEXA			NA	NA	NA	NA	YES	
AC SELF CHECK (With Wi-Fi App)			NA	NA	NA	NA	NA	
3D SLEEP (With Wi-Fi APP)			NA	NA	NA	NA	NA	
COMFORT MODE (With Wi-Fi App)			NA	NA	NA	NA	NA	
OTP INSTALLATION SETUP			NA	NA	NA	NA	NA	
AI ECOMASTER			NA	NA	NA	NA	NA	
DYNAMIC CIRCLE RESPONSIVE DISPLAY			NA	NA	NA	NA	NA	
MIDEA INTELLIGENCE (OFFLINE VOICE CONTROL)			NA	NA	NA	NA	NA	

*T&C apply.

SPLIT INVERTER AIR CONDITIONERS

GENERAL			SANTIS MAX DLX Wi-Fi	SANTIS MAX DLX Wi-Fi	SANTIS MAX DLX Wi-Fi	SANTIS MAX RYL	SANTIS MAX RYL	
	MODEL NO.		MAI18SD3R36W0	MAI19SD3R36W0	MAI24SD3R36W0	MAI12SR5R36F0	MAI18SR5R36F0	
	TONNAGE CATEGORY	T	1.5	1.5	2.0	1.0	1.5	
	MAXIMUM CAPACITY RANGE	Watt	5400	5760	6580	4080	5400	
	FULL LOAD CAPACITY (100% Load Rated)	Watt	4800	5050	6000	3400	4800	
	HALF LOAD CAPACITY (50%)	Watt	2400	2525	3000	1700	2400	
	FULL LOAD POWER INPUT* (100% Load Rated)	Watt	1435	1480	1780	745	1100	
	HALF LOAD POWER INPUT*(50% Load)	Watt	502	525	632	290	394	
	ANNUAL POWER CONSUMPTION	kWh	854.39	887.80	1068.29	470.04	663.31	
	LABEL PERIOD		"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	
	BEE STAR RATING***		3 Star	3 Star	3 Star	5 Star	5 Star	
	ISEER VALUE	W/W	4.35	4.40	4.35	5.60	5.60	
	RATED POWER SUPPLY	V-Ph-Hz	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	
	RATED AMP	Amp	6.3	6.5	7.8	3.3	4.8	
	NET WEIGHT	kg (IDU/ODU)	10.1 / 21	10.1 / 25.5	12.5 / 28	10.3 / 23.6	11.5 / 32	
	AIR FLOW RATE	CFM	580	580	700	580	600	
	INDOOR NOISE LEVEL (H/M/L)	db	42/40/37	42/40/37	46/44/39	40/38/32	44/42/38	
	FAN MOTOR (INDOOR)	No. of speeds	4	4	4	4	4	
	WITH CONNECTING KIT PIPE		YES	YES	YES	YES	YES	
	VALVE SIZE	inch	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	
MOISTURE REMOVAL RATE	kg/h	2.0	2.0	2.4	1.2	2.0		
OVERALL SIZE	INDOOR UNIT (HEIGHT)	mm	275	275	315	275	324	
	INDOOR UNIT (WIDTH)	mm	940	940	1045	940	965	
	INDOOR UNIT (DEPTH)	mm	205	205	235	205	234	
	OUTDOOR UNIT (HEIGHT)	mm	480	540	540	540	645	
OUTDOOR UNIT (WIDTH)	mm	720	790	790	790	890		
OUTDOOR UNIT (DEPTH-with Grill)	mm	270	270	270	270	355		
FILTERS	CONVENTIONAL HD FILTER		YES	YES	YES	YES	YES	
	TOP HD FILTER		NA	NA	NA	NA	NA	
	PM2.5 MICRON FILTER(3M Brand)		NA	NA	NA	NA	NA	
	PM2.5 MICRON FILTER		YES	YES	YES	YES	YES	
	AG+ NANO FILTER		NA	NA	NA	NA	NA	
SMART FEATURES	(AVG) ANTIVIRAL GUARD COATED FILTER		NA	NA	NA	NA	NA	
	REFRIGERANT		R32	R32	R32	R32	R32	
	INVERTER TECHNOLOGY - QUATTRO		YES	YES	YES	YES	YES	
	AIR DIRECTION CONTROL		YES	YES	YES	YES	YES	
	SECURITY LOCK		YES	YES	YES	YES	YES	
	IDU TEMP DISPLAY		Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	
	REMOTE CONTROL TYPE		LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	
	REMOTE BACKLIT (1.0)		YES	YES	YES	YES	YES	
	NEW REMOTE BACKLIT (2.0)		NA	NA	NA	NA	NA	
	AUTO-OFF TIMER		YES	YES	YES	YES	YES	
	AUTO-ON TIMER		YES	YES	YES	YES	YES	
	SLEEP MODE		YES	YES	YES	YES	YES	
	REFRIGERANT LEAKAGE DETECTOR		YES	YES	YES	YES	YES	
	LOUVER POSITION MEMORY		YES	YES	YES	YES	YES	
	DRY MODE		YES	YES	YES	YES	YES	
	AUTO FAN SPEED		YES	YES	YES	YES	YES	
	INTELLIGENT CRF ALERT		YES	YES	YES	YES	YES	
	AUTO SWING		YES	YES	YES	YES	YES	
	AUTO CLEANER (Defrost clean)		YES	YES	YES	YES	YES	
	FOLLOW ME		YES	YES	YES	YES	YES	
	AUTO MODE		YES	YES	YES	YES	YES	
	AUTO RESTART		YES	YES	YES	YES	YES	
	DOUBLE DRAIN (EASY INSTALLATION)		YES	YES	YES	YES	YES	
	EASY INSTALLATION - SERVICE SUPPORT BRACKET IDU		NA	NA	NA	NA	NA	
	GEAR (6-IN-1)		YES	YES	YES	YES	YES	
	INSTA COOL/TURBO		YES	YES	YES	YES	YES	
	MY MODE (Favorite mode)		YES	YES	YES	YES	YES	
	TEMP DISPLAY ON/OFF		YES	YES	YES	YES	YES	
	SILENT		NA	NA	NA	NA	NA	
	4-WAY SWING		NA	NA	NA	NA	NA	
	PRIME GUARD		ANTI-CORROSION COATING (BLUE)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
			HYDROPHILIC BLUE COIL	Evap & Cond both	Evap & Cond both	Evap & Cond both	Evap & Cond both	Evap & Cond both
HIGH-AMBIENT WORKING			52°C	52°C	52°C	52°C	52°C	
HEAVY DUTY (100% RATED CAPACITY @43°C)			NA	NA	NA	YES	YES	
STABILIZER-FREE OPERATION (Even @48°C, 135-280 V)			YES	YES	YES	YES	YES	
kW/SED DISPLAY			NA	NA	NA	NA	NA	
PRECISE TEMP CONTROL			NA	NA	NA	NA	NA	
ANTI MOLD			YES	YES	YES	YES	YES	
INSTALLER-FRIENDLY PULL DOWN STRUCTURE			NA	NA	NA	NA	NA	
Wi-Fi (Ver 1.0)			YES	YES	YES	NA	NA	
Wi-Fi (Ver 2.0 AI+)			NA	NA	NA	NA	NA	
OTA SOFTWARE UPDATE (With Wi-Fi App)			NA	NA	NA	NA	NA	
GEOFENCING (With Wi-Fi App)			NA	NA	NA	NA	NA	
GOOGLE ACTION			YES	YES	YES	NA	NA	
AMAZON ALEXA			YES	YES	YES	NA	NA	
AC SELF CHECK (With Wi-Fi App)			NA	NA	NA	NA	NA	
3D SLEEP (With Wi-Fi APP)			NA	NA	NA	NA	NA	
COMFORT MODE (With Wi-Fi App)			NA	NA	NA	NA	NA	
OTP INSTALLATION SETUP			NA	NA	NA	NA	NA	
AI ECOMASTER			NA	NA	NA	NA	NA	
DYNAMIC CIRCLE RESPONSIVE DISPLAY			NA	NA	NA	NA	NA	
MIDEA INTELLIGENCE (OFFLINE VOICE CONTROL)			NA	NA	NA	NA	NA	

*T&C apply.

SPLIT INVERTER AIR CONDITIONERS

			Santis MAX RYL	Santis MAX RYL Wi-Fi	Santis MAX RYL Wi-Fi	Santis MAX RYL Wi-Fi	Santis ACE DLX	
	MODEL NO.		MAI24SR5R36F0	MAI12SR5R36W0	MAI18SR5R36W0	MAI24SR5R36W0	MAI12SA3R36F0	
GENERAL	TONNAGE CATEGORY		T	2.0	1.0	1.5	2.0	1.0
	MAXIMUM CAPACITY RANGE		Watt	6580	4080	5400	6580	4080
	FULL LOAD CAPACITY (100% Load Rated)		Watt	6000	3400	4800	6000	3450
	HALF LOAD CAPACITY (50%)		Watt	3000	1700	2400	3000	1725
	FULL LOAD POWER INPUT* (100% Load Rated)		Watt	1440	745	1100	1440	1000
	HALF LOAD POWER INPUT*(50% Load)		Watt	465	290	394	465	370
	ANNUAL POWER CONSUMPTION		kWh	828.89	470.04	663.31	828.89	613.7
	LABEL PERIOD			"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"
	BEE STAR RATING***			5 Star	5 Star	5 Star	5 Star	3 Star
	ISEER VALUE		W/W	5.60	5.60	5.60	5.60	4.35
	RATED POWER SUPPLY		V-Ph-Hz	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	RATED AMP		Amp	6.3	3.3	4.8	6.3	4.4
	NET WEIGHT		kg (IDU/ODU)	12.5 / 38.5	10.3 / 23.6	11.5 / 32	12.5 / 38.5	8.4 / 19
	AIR FLOW RATE		CFM	700	580	600	700	500
	INDOOR NOISE LEVEL (H/M/L)		db	46/44/38	40/38/32	44/42/38	46/44/38	40/38/32
	FAN MOTOR (INDOOR)		No. of speeds	4	4	4	4	5
	WITH CONNECTING KIT PIPE			YES	YES	YES	YES	YES
	VALVE SIZE		inch	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	3/8" x 1/4"
	OVERALL SIZE	MOISTURE REMOVAL RATE		kg/h	2.4	1.2	2.0	2.4
INDOOR UNIT (HEIGHT)		mm	315	275	324	315	285	
INDOOR UNIT (WIDTH)		mm	1045	940	965	1045	820	
INDOOR UNIT (DEPTH)		mm	235	205	234	235	205	
OUTDOOR UNIT (HEIGHT)		mm	645	540	645	645	480	
OUTDOOR UNIT (WIDTH)		mm	890	790	890	890	720	
OUTDOOR UNIT (DEPTH-with Grill)		mm	355	270	355	355	270	
FILTERS	CONVENTIONAL HD FILTER		YES	YES	YES	YES	YES	
	TOP HD FILTER		NA	NA	NA	NA	NA	
	PM2.5 MICRON FILTER(3M Brand)		NA	NA	NA	NA	NA	
	PM2.5 MICRON FILTER		YES	YES	YES	YES	YES	
	AG+ NANO FILTER		NA	NA	NA	NA	NA	
	(AVG) ANTIVIRAL GUARD COATED FILTER		NA	NA	NA	NA	NA	
SMART FEATURES	REFRIGERANT		R32	R32	R32	R32	R32	
	INVERTER TECHNOLOGY - QUATTRO		YES	YES	YES	YES	YES	
	AIR DIRECTION CONTROL		YES	YES	YES	YES	YES	
	SECURITY LOCK		YES	YES	YES	YES	YES	
	IDU TEMP DISPLAY		Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	
	REMOTE CONTROL TYPE		LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	
	REMOTE BACKLIT (1.0)		YES	YES	YES	YES	NA	
	NEW REMOTE BACKLIT (2.0)		NA	NA	NA	NA	YES	
	AUTO-OFF TIMER		YES	YES	YES	YES	YES	
	AUTO-ON TIMER		YES	YES	YES	YES	YES	
	SLEEP MODE		YES	YES	YES	YES	YES	
	REFRIGERANT LEAKAGE DETECTOR		YES	YES	YES	YES	YES	
	LOUVER POSITION MEMORY		YES	YES	YES	YES	YES	
	DRY MODE		YES	YES	YES	YES	YES	
	AUTO FAN SPEED		YES	YES	YES	YES	YES	
	INTELLIGENT CRF ALERT		YES	YES	YES	YES	YES	
	AUTO SWING		YES	YES	YES	YES	YES	
	AUTO CLEANER (Defrost clean)		YES	YES	YES	YES	YES	
	FOLLOW ME		YES	YES	YES	YES	YES	
	AUTO MODE		YES	YES	YES	YES	YES	
	AUTO RESTART		YES	YES	YES	YES	YES	
	DOUBLE DRAIN (EASY INSTALLATION)		YES	YES	YES	YES	YES	
	EASY INSTALLATION - SERVICE SUPPORT BRACKET IDU		NA	NA	NA	NA	YES	
	GEAR (6-IN-1)		YES	YES	YES	YES	YES	
	INSTA COOL/TURBO		YES	YES	YES	YES	YES	
	MY MODE (Favorite mode)		YES	YES	YES	YES	YES	
	TEMP DISPLAY ON/OFF		YES	YES	YES	YES	YES	
	SILENT		NA	NA	NA	NA	YES	
	4-WAY SWING		NA	NA	NA	NA	YES	
	PRIME GUARD		ANTI-CORROSION COATING (BLUE)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
			HYDROPHILIC BLUE COIL	Evap only	Evap & Cond both	Evap & Cond both	Evap only	Evap & Cond both
	HIGH-AMBIENT WORKING			52°C	52°C	52°C	52°C	54°C
	HEAVY DUTY (100% RATED CAPACITY @43°C)			YES	YES	YES	YES	YES
	STABILIZER-FREE OPERATION (Even @48°C, 135-280 V)			YES	YES	YES	YES	YES
	kW/SED DISPLAY			NA	NA	NA	NA	KW display
	PRECISE TEMP CONTROL			NA	NA	NA	NA	YES
ANTI MOLD			YES	YES	YES	YES	YES	
INSTALLER-FRIENDLY PULL DOWN STRUCTURE			NA	NA	NA	NA	YES	
Wi-Fi (Ver 1.0)			NA	YES	YES	YES	NA	
Wi-Fi (Ver 2.0 AI+)			NA	NA	NA	NA	NA	
OTA SOFTWARE UPDATE (With Wi-Fi App)			NA	NA	NA	NA	NA	
GEOFENCING (With Wi-Fi App)			NA	NA	NA	NA	NA	
GOOGLE ACTION			NA	YES	YES	YES	NA	
AMAZON ALEXA			NA	YES	YES	YES	NA	
AC SELF CHECK (With Wi-Fi App)			NA	NA	NA	NA	NA	
3D SLEEP (With Wi-Fi APP)			NA	NA	NA	NA	NA	
COMFORT MODE (With Wi-Fi App)			NA	NA	NA	NA	NA	
OTP INSTALLATION SETUP			NA	NA	NA	NA	YES	
AI ECOMASTER			NA	NA	NA	NA	YES	
DYNAMIC CIRCLE RESPONSIVE DISPLAY			NA	NA	NA	NA	NA	
MIDEA INTELLIGENCE (OFFLINE VOICE CONTROL)			NA	NA	NA	NA	NA	

*T&C apply.

SPLIT INVERTER AIR CONDITIONERS

			SANTIS ACE DLX	SANTIS ACE DLX	SANTIS ACE DLX	SANTIS ACE RYL Wi-Fi
	MODEL NO.		MAI18SA3R36F0	MAI19SA3R36F0	MAI24SA3R36F0	MAI12SA5R36W0
GENERAL	TONNAGE CATEGORY		T	1.5	1.5	1.0
	MAXIMUM CAPACITY RANGE		Watt	5400	5760	4080
	FULL LOAD CAPACITY (100% Load Rated)		Watt	4850	5050	3400
	HALF LOAD CAPACITY (50%)		Watt	2425	2525	1700
	FULL LOAD POWER INPUT* (100% Load Rated)		Watt	1450	1480	745
	HALF LOAD POWER INPUT*(50% Load)		Watt	497	525	290
	ANNUAL POWER CONSUMPTION		kWh	853.92	887.80	470.04
	LABEL PERIOD			"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"
	BEE STAR RATING***			3 Star	3 Star	5 Star
	ISEER VALUE		W/W	4.40	4.40	5.60
	RATED POWER SUPPLY		V-Ph-Hz	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	RATED AMP		Amp	6.4	6.5	3.3
	NET WEIGHT		kg (IDU/ODU)	10.3 / 21	10.3 / 25.5	8.4 / 23.6
	AIR FLOW RATE		CFM	620	620	500
	INDOOR NOISE LEVEL (H/M/L)		db	46/44/38	46/44/38	40/38/32
	FAN MOTOR (INDOOR)		No. of speeds	5	5	5
	WITH CONNECTING KIT PIPE			YES	YES	YES
OVERALL SIZE	VALVE SIZE		inch	3/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"
	MOISTURE REMOVAL RATE		kg/h	2	2	1.2
	INDOOR UNIT (HEIGHT)		mm	306	306	285
	INDOOR UNIT (WIDTH)		mm	985	985	820
	INDOOR UNIT (DEPTH)		mm	217	217	205
	OUTDOOR UNIT (HEIGHT)		mm	480	540	540
	OUTDOOR UNIT (WIDTH)		mm	720	790	790
	OUTDOOR UNIT (DEPTH-with Grill)		mm	270	270	270
FILTERS	CONVENTIONAL HD FILTER			YES	YES	YES
	TOP HD FILTER			NA	NA	NA
	PM2.5 MICRON FILTER (3M Brand)			NA	NA	NA
	PM2.5 MICRON FILTER			YES	YES	YES
	AG+ NANO FILTER			NA	NA	NA
	(AVG) ANTIVIRAL GUARD COATED FILTER			NA	NA	NA
SMART FEATURES	REFRIGERANT			R32	R32	R32
	INVERTER TECHNOLOGY - QUATTRO			YES	YES	YES
	AIR DIRECTION CONTROL			YES	YES	YES
	SECURITY LOCK			YES	YES	YES
	IDU TEMP DISPLAY			Hidden Display	Hidden Display	Hidden Display
	REMOTE CONTROL TYPE			LCD Remote	LCD Remote	LCD Remote
	REMOTE BACKLIT (1.0)			NA	NA	NA
	NEW REMOTE BACKLIT (2.0)			YES	YES	YES
	AUTO-OFF TIMER			YES	YES	YES
	AUTO-ON TIMER			YES	YES	YES
	SLEEP MODE			YES	YES	YES
	REFRIGERANT LEAKAGE DETECTOR			YES	YES	YES
	LOUVER POSITION MEMORY			YES	YES	YES
	DRY MODE			YES	YES	YES
	AUTO FAN SPEED			YES	YES	YES
	INTELLIGENT CRF ALERT			YES	YES	YES
	AUTO SWING			YES	YES	YES
	AUTO CLEANER (Defrost clean)			YES	YES	YES
	FOLLOW ME			YES	YES	YES
	AUTO MODE			YES	YES	YES
	AUTO RESTART			YES	YES	YES
	DOUBLE DRAIN (EASY INSTALLATION)			YES	YES	YES
	EASY INSTALLATION - SERVICE SUPPORT BRACKET IDU			YES	YES	YES
	GEAR (6-IN-1)			YES	YES	YES
	INSTA COOL/TURBO			YES	YES	YES
	MY MODE (Favorite mode)			YES	YES	YES
	TEMP DISPLAY ON/OFF			YES	YES	YES
	SILENT			YES	YES	YES
	4-WAY SWING			YES	YES	YES
	PRIME GUARD	ANTI-CORROSION COATING (BLUE)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
		HYDROPHILIC BLUE COIL	Evap & Cond both	Evap & Cond both	Evap & Cond both	Evap & Cond both
	HIGH-AMBIENT WORKING			54°C	54°C	54°C
	HEAVY DUTY (100% RATED CAPACITY @43°C)			YES	YES	YES
	STABILIZER-FREE OPERATION (Even @48°C, 135-280 V)			YES	YES	YES
	kW/SED DISPLAY			KW display	KW display	KW display
	PRECISE TEMP CONTROL			YES	YES	YES
	ANTI MOLD			YES	YES	YES
	INSTALLER-FRIENDLY PULL DOWN STRUCTURE			YES	YES	YES
	Wi-Fi (Ver 1.0)			NA	NA	NA
	Wi-Fi (Ver 2.0 AI+)			NA	NA	YES
	OTA SOFTWARE UPDATE (With Wi-Fi App)			NA	NA	YES
	GEOFENCING (With Wi-Fi App)			NA	NA	YES
	GOOGLE ACTION			NA	NA	YES
	AMAZON ALEXA			NA	NA	YES
	AC SELF CHECK (With Wi-Fi App)			NA	NA	YES
	3D SLEEP (With Wi-Fi APP)			NA	NA	YES
	COMFORT MODE (With Wi-Fi App)			NA	NA	YES
	OTP INSTALLATION SETUP			YES	YES	YES
	AI ECOMASTER			YES	YES	YES
	DYNAMIC CIRCLE RESPONSIVE DISPLAY			NA	NA	NA
	MIDEA INTELLIGENCE (OFFLINE VOICE CONTROL)			NA	NA	NA

*T&C apply.

SPLIT INVERTER AIR CONDITIONERS

			SANTIS ACE RYL WI-FI	SANTIS ACE RYL WI-FI	SANTIS NXG DLX V PRO	SANTIS NXG DLX V PRO
	MODEL NO.		MAI19SA5R36W0	MAI24SA5R36W0	MAI12SX3R36F0	MAI18SX3R36F0
GENERAL	TONNAGE CATEGORY		T			
	MAXIMUM CAPACITY RANGE		Watt			
	FULL LOAD CAPACITY (100% Load Rated)		Watt			
	HALF LOAD CAPACITY (50%)		Watt			
	FULL LOAD POWER INPUT* (100% Load Rated)		Watt			
	HALF LOAD POWER INPUT*(50% Load)		Watt			
	ANNUAL POWER CONSUMPTION		kWh			
	LABEL PERIOD					
	BEE STAR RATING***					
	ISEER VALUE		W/W			
	RATED POWER SUPPLY		V-Ph-Hz			
	RATED AMP		Amp			
	NET WEIGHT		kg (IDU/ODU)			
	AIR FLOW RATE		CFM			
	INDOOR NOISE LEVEL (H/M/L)		db			
	FAN MOTOR (INDOOR)		No. of speeds			
	WITH CONNECTING KIT PIPE					
	VALVE SIZE		inch			
OVERALL SIZE	MOISTURE REMOVAL RATE		kg/h			
	INDOOR UNIT (HEIGHT)		mm			
	INDOOR UNIT (WIDTH)		mm			
	INDOOR UNIT (DEPTH)		mm			
	OUTDOOR UNIT (HEIGHT)		mm			
	OUTDOOR UNIT (WIDTH)		mm			
	OUTDOOR UNIT (DEPTH-with Grill)		mm			
FILTERS	CONVENTIONAL HD FILTER					
	TOP HD FILTER					
	PM2.5 MICRON FILTER(3M Brand)					
	PM2.5 MICRON FILTER					
	AG+ NANO FILTER					
	(AVG) ANTIVIRAL GUARD COATED FILTER					
SMART FEATURES	REFRIGERANT					
	INVERTER TECHNOLOGY - QUATTRO					
	AIR DIRECTION CONTROL					
	SECURITY LOCK					
	IDU TEMP DISPLAY					
	REMOTE CONTROL TYPE					
	REMOTE BACKLIT (1.0)					
	NEW REMOTE BACKLIT (2.0)					
	AUTO-OFF TIMER					
	AUTO-ON TIMER					
	SLEEP MODE					
	REFRIGERANT LEAKAGE DETECTOR					
	LOUVER POSITION MEMORY					
	DRY MODE					
	AUTO FAN SPEED					
	INTELLIGENT CRF ALERT					
	AUTO SWING					
	AUTO CLEANER (Defrost clean)					
	FOLLOW ME					
	AUTO MODE					
	AUTO RESTART					
	DOUBLE DRAIN (EASY INSTALLATION)					
	EASY INSTALLATION - SERVICE SUPPORT BRACKET IDU					
	GEAR (6-IN-1)					
	INSTA COOL/TURBO					
	MY MODE (Favorite mode)					
	TEMP DISPLAY ON/OFF					
	SILENT					
	4-WAY SWING					
	PRIME GUARD	ANTI-CORROSION COATING (BLUE)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
		HYDROPHILIC BLUE COIL	Evap & Cond both	Evap only	Evap & Cond both	Evap & Cond both
	HIGH-AMBIENT WORKING		54°C	54°C	54°C	54°C
	HEAVY DUTY (100% RATED CAPACITY @43°C)		YES	YES	YES	YES
	STABILIZER-FREE OPERATION (Even @48°C, 135-280 V)		YES	YES	YES	YES
	kW/SED DISPLAY		KW display	KW display	KW display	KW display
	PRECISE TEMP CONTROL		YES	YES	YES	YES
	ANTI MOLD		YES	YES	YES	YES
	INSTALLER-FRIENDLY PULL DOWN STRUCTURE		YES	YES	YES	YES
	Wi-Fi (Ver 1.0)		NA	NA	NA	NA
	Wi-Fi (Ver 2.0 AI+)		YES	YES	NA	NA
	OTA SOFTWARE UPDATE (With Wi-Fi App)		YES	YES	NA	NA
	GEOFENCING (With Wi-Fi App)		YES	YES	NA	NA
	GOOGLE ACTION		YES	YES	NA	NA
	AMAZON ALEXA		YES	YES	NA	NA
	AC SELF CHECK (With Wi-Fi App)		YES	YES	NA	NA
	3D SLEEP (With Wi-Fi APP)		YES	YES	NA	NA
	COMFORT MODE (With Wi-Fi App)		YES	YES	NA	NA
	OTP INSTALLATION SETUP		YES	YES	YES	YES
	AI ECOMASTER		YES	YES	YES	YES
	DYNAMIC CIRCLE RESPONSIVE DISPLAY		NA	NA	YES	YES
	MIDEA INTELLIGENCE (OFFLINE VOICE CONTROL)		NA	NA	YES	YES

*T&C apply.

SPLIT INVERTER AIR CONDITIONERS

			SANTIS NXG DLX (V PRO)	SANTIS NXG DLX (V PRO)	SANTIS NXG RYL V PRO (Wi-Fi)	SANTIS NXG RYL V PRO (Wi-Fi)	SANTIS NXG RYL V PRO (Wi-Fi)
	MODEL NO.		MAI19SX3R36F0	MAI24SX3R36F0	MAI12SX5R36W0	MAI19SX5R36W0	MAI24SX5R36W0
GENERAL	TONNAGE CATEGORY	T	1.5	2.0	1.0	1.5	2.0
	MAXIMUM CAPACITY RANGE	Watt	5760	6580	4080	5400	6580
	FULL LOAD CAPACITY (100% Load Rated)	Watt	5050	6000	3400	5000	6000
	HALF LOAD CAPACITY (50%)	Watt	2525	3000	1700	2500	3000
	FULL LOAD POWER INPUT* (100% Load Rated)	Watt	1480	1780	745	1130	1390
	HALF LOAD POWER INPUT*(50% Load)	Watt	525	632	290	415	480
	ANNUAL POWER CONSUMPTION	kWh	887.80	1068.29	470.04	690.69	821.86
	LABEL PERIOD		"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"
	BEE STAR RATING***		3 Star	3 Star	5 Star	5 Star	5 Star
	ISEER VALUE	W/W	4.40	4.35	5.60	5.60	5.65
	RATED POWER SUPPLY	V-Ph-Hz	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	RATED AMP	Amp	6.5	7.8	3.3	5.0	6.3
	NET WEIGHT	kg (IDU/ODU)	10.3 / 25.5	13 / 28	8.4 / 23.6	10.5 / 32	13 / 38.5
	AIR FLOW RATE	CFM	620	830	500	620	830
	INDOOR NOISE LEVEL (H/M/L)	db	46/44/38	48/46/43	40/38/32	46/44/38	48/46/43
	FAN MOTOR (INDOOR)	No. of speeds	5	5	5	5	5
	WITH CONNECTING KIT PIPE		YES	YES	YES	YES	YES
	VALVE SIZE	inch	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"
OVERALL SIZE	MOISTURE REMOVAL RATE	kg/h	2	2.4	1.2	2	2.4
	INDOOR UNIT (HEIGHT)	mm	306	328	285	306	328
	INDOOR UNIT (WIDTH)	mm	985	1065	820	985	1065
	INDOOR UNIT (DEPTH)	mm	217	235	205	217	235
	OUTDOOR UNIT (HEIGHT)	mm	540	540	540	645	645
	OUTDOOR UNIT (WIDTH)	mm	790	790	790	890	890
	OUTDOOR UNIT (DEPTH-with Grill)	mm	270	270	270	355	355
FILTERS	CONVENTIONAL HD FILTER		YES	YES	YES	YES	YES
	TOP HD FILTER		NA	NA	NA	NA	NA
	PM2.5 MICRON FILTER (3M Brand)		NA	NA	NA	NA	NA
	PM2.5 MICRON FILTER		YES	YES	YES	YES	YES
	AG+ NANO FILTER		NA	NA	NA	NA	NA
	(AVG) ANTIVIRAL GUARD COATED FILTER		NA	NA	NA	NA	NA
SMART FEATURES	REFRIGERANT		R32	R32	R32	R32	R32
	INVERTER TECHNOLOGY - QUATTRO		YES	YES	YES	YES	YES
	AIR DIRECTION CONTROL		YES	YES	YES	YES	YES
	SECURITY LOCK		YES	YES	YES	YES	YES
	IDU TEMP DISPLAY		Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	REMOTE CONTROL TYPE		LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	REMOTE BACKLIT (1.0)		NA	NA	NA	NA	NA
	NEW REMOTE BACKLIT (2.0)		YES	YES	YES	YES	YES
	AUTO-OFF TIMER		YES	YES	YES	YES	YES
	AUTO-ON TIMER		YES	YES	YES	YES	YES
	SLEEP MODE		YES	YES	YES	YES	YES
	REFRIGERANT LEAKAGE DETECTOR		YES	YES	YES	YES	YES
	LOUVER POSITION MEMORY		YES	YES	YES	YES	YES
	DRY MODE		YES	YES	YES	YES	YES
	AUTO FAN SPEED		YES	YES	YES	YES	YES
	INTELLIGENT CRF ALERT		YES	YES	YES	YES	YES
	AUTO SWING		YES	YES	YES	YES	YES
	AUTO CLEANER (Defrost clean)		YES	YES	YES	YES	YES
	FOLLOW ME		YES	YES	YES	YES	YES
	AUTO MODE		YES	YES	YES	YES	YES
	AUTO RESTART		YES	YES	YES	YES	YES
	DOUBLE DRAIN (EASY INSTALLATION)		YES	YES	YES	YES	YES
	EASY INSTALLATION - SERVICE SUPPORT BRACKET IDU		YES	YES	YES	YES	YES
	GEAR (6-IN-1)		YES	YES	YES	YES	YES
	INSTA COOL/TURBO		YES	YES	YES	YES	YES
	MY MODE (Favorite mode)		YES	YES	YES	YES	YES
	TEMP DISPLAY ON/OFF		YES	YES	YES	YES	YES
	SILENT		YES	YES	YES	YES	YES
	4-WAY SWING		YES	YES	YES	YES	YES
	PRIME GUARD	ANTI-CORROSION COATING (BLUE)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
		HYDROPHILIC BLUE COIL	Evap & Cond both	Evap & Cond both	Evap & Cond both	Evap & Cond both	Evap only
	HIGH-AMBIENT WORKING		54°C	54°C	54°C	54°C	54°C
	HEAVY DUTY (100% RATED CAPACITY @43°C)		YES	YES	YES	YES	YES
	STABILIZER-FREE OPERATION (Even @48°C, 135-280 V)		YES	YES	YES	YES	YES
	kW/SED DISPLAY		KW display	KW display	KW display	KW display	KW display
	PRECISE TEMP CONTROL		YES	YES	YES	YES	YES
	ANTI MOLD		YES	YES	YES	YES	YES
	INSTALLER-FRIENDLY PULL DOWN STRUCTURE		YES	YES	YES	YES	YES
	Wi-Fi (Ver 1.0)		NA	NA	NA	NA	NA
	Wi-Fi (Ver 2.0 AI+)		NA	NA	YES	YES	YES
	OTA SOFTWARE UPDATE (With Wi-Fi App)		NA	NA	YES	YES	YES
	GEOFENCING (With Wi-Fi App)		NA	NA	YES	YES	YES
	GOOGLE ACTION		NA	NA	YES	YES	YES
	AMAZON ALEXA		NA	NA	YES	YES	YES
	AC SELF CHECK (With Wi-Fi App)		NA	NA	YES	YES	YES
	3D SLEEP (With Wi-Fi APP)		NA	NA	YES	YES	YES
	COMFORT MODE (With Wi-Fi App)		NA	NA	YES	YES	YES
	OTP INSTALLATION SETUP		YES	YES	YES	YES	YES
	AI ECOMASTER		YES	YES	YES	YES	YES
	DYNAMIC CIRCLE RESPONSIVE DISPLAY		YES	YES	YES	YES	YES
	MIDEA INTELLIGENCE (OFFLINE VOICE CONTROL)		YES	YES	YES	YES	YES

**T&C apply.

SPLIT FIXED SPEED AIR CONDITIONERS

GENERAL	PARAMETER		UNIT	SANTIS MAX CLS	SANTIS MAX CLS	SANTIS MAX CLS	SANTIS MAX CLS	SANTIS MAX CLS
	MODEL NO.			MAS13SM2R36F0	MAS19SM2R36F0	MAS19SM2R36F1	MAS18SM3R36F0	MAS24SM2R36F0
	TONNAGE CATEGORY		T	1.0	1.5	1.5	1.5	2.0
	RATED CAPACITY*		Watt	3600	5200	5200	5000	6050
	NOMINAL COOLING / HEATING POWER INPUT*		Watt	940	1350	1350	1150	1570
	ANNUAL POWER		kWh	727.66	1045.04	1045.04	890.22	1215.35
	LABEL PERIOD			"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"	"1st Jan,2026 - 31st Dec,2027"
	BEE STAR RATING***			2 Star	2 Star	2 Star	3 Star	2 Star
	ISEER VALUE		W/W	3.83	3.85	3.85	4.35	3.85
	RATED POWER SUPPLY		V-Ph-Hz	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	RATED AMP		Amp	4.1	5.9	5.9	5.1	6.9
	NET WEIGHT		Kg (IDU/ODU)	8.3 / 28	11.5 / 33.5	11.5 / 33.5	11.5 / 38	12.5 / 43.6
	AIR FLOW RATE		CFM	400	700	700	700	700
	INDOOR NOISE LEVEL (H/M/L)		db	40/38/32	44/42/38	44/42/38	44/42/38	46/44/40
	FAN MOTOR (INDOOR)		No. of speeds	4	4	4	4	4
OVERALL SIZE	WITH CONNECTING KIT PIPE			YES	YES	YES	YES	YES
	VALVE SIZE		inch	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"
	INDOOR UNIT (HEIGHT)		mm	282	324	324	324	320
	INDOOR UNIT (WIDTH)		mm	800	965	965	965	1046
	INDOOR UNIT (DEPTH)		mm	192	234	234	234	240
	OUTDOOR UNIT (HEIGHT)		mm	540	540	540	700	700
FILTERS	OUTDOOR UNIT (WIDTH)		mm	790	790	790	845	845
	OUTDOOR UNIT (DEPTH-with Grill)		mm	270	270	270	310	310
	HD FILTER			YES	YES	YES	YES	YES
	PM2,5 MICRON FILTER			YES	YES	YES	YES	YES
	AG+ NANO FILTER			NA	NA	NA	NA	NA
SMART FEATURES	HYPER PROTECTIVE FILTER			NA	NA	NA	NA	NA
	(AVG) ANTIVIRAL GUARD COATED FILTER			NA	NA	NA	NA	NA
	HYBRIDJET GRILL			NA	NA	NA	NA	NA
	REFRIGERANT			R32	R32	R32	R32	R32
	AIR DIRECTION CONTROL			YES	YES	YES	YES	YES
	SECURITY LOCK			YES	YES	YES	YES	YES
	IDU TEMP DISPLAY			Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	REMOTE CONTROL TYPE			LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	REMOTE BACKLIT			YES	YES	YES	YES	YES
	AUTO-OFF TIMER			YES	YES	YES	YES	YES
	AUTO-ON TIMER			YES	YES	YES	YES	YES
	SLEEP MODE			YES	YES	YES	YES	YES
	REFRIGERANT LEAKAGE DETECTOR			YES	YES	YES	YES	YES
	LOUVER POSITION MEMORY			YES	YES	YES	YES	YES
	DRY MODE			YES	YES	YES	YES	YES
	AUTO FAN SPEED			YES	YES	YES	YES	YES
	INTELLIGENT CRF ALERT			YES	YES	YES	YES	YES
	AUTO SWING			YES	YES	YES	YES	YES
	AUTO CLEANER (Defrost clean)			YES	YES	YES	YES	YES
	ANTI MOLD			YES	YES	YES	YES	YES
	FOLLOW ME			NA	NA	NA	NA	NA
	AUTO MODE			YES	YES	YES	YES	YES
	AUTO RESTART			YES	YES	YES	YES	YES
	TURBO MODE			YES	YES	YES	YES	YES
	DOUBLE DRAIN (EASY INSTALLATION)			YES	YES	YES	YES	YES
	MANUAL ON/OFF BUTTON			YES	YES	YES	YES	YES
	MY MODE (FAVOURITE MODE)			NA	NA	NA	NA	NA
	HIGH-AMBIENT WORKING (at 230 V rated)			52°C	52°C	52°C	52°C	52°C
	IDU DISPLAY ON/OFF			YES	YES	YES	YES	YES
	SILENT			NA	NA	NA	NA	NA
	4-WAY SWING			NA	NA	NA	NA	NA
	PRIME GUARD	ANTI-CORROSION COATING (BLUE) HYDROPHILIC BLUE COIL		Evap- Hair pin in side Evap & Cond both	Evap- Hair pin in side Evap & Cond both	Evap- Hair pin in side Evap & Cond both	Evap- Hair pin in side Evap & Cond both	Evap- Hair pin in side Evap & Cond both

*T&C apply.

SPLIT AIRCONDITIONERS

	PARAMETER	UNIT	SANTIS MEGA
GENERAL	MODEL NO.		MAI36SM4R35F0
	TONNAGE CATEGORY	T	3.0
	MAXIMUM CAPACITY RANGE	Watt	11500
	FULL LOAD CAPACITY (100% Load Rated)	Watt	10560
	HALF LOAD CAPACITY (50%)	Watt	5280
	FULL LOAD POWER INPUT* (100% Load Rated)	Watt	3450
	HALF LOAD POWER INPUT*(50% load)	Watt	1350
	ANNUAL POWER CONSUMPTION	kWh	2182.97
	LABEL PERIOD		"1st July,2023 - 31st March 2026"
	BEE STAR RATING***		4 Star
	ISEER VALUE	W/W	3.74
	RATED POWER SUPPLY	V-Ph-Hz	230 - 1 - 50
	RATED AMP	Amp	16.7
	NET WEIGHT	kg (IDU/ODU)	17.9 / 52.5
	AIR FLOW RATE	CFM	1025
	INDOOR NOISE LEVEL (H/M/L)	db	56/52/50
	FAN MOTOR (INDOOR)	No. of speeds	4
	WITH CONNECTING KIT PIPE		YES
	VALVE SIZE	inch	5/8" x 3/8"
OVERALL SIZE	MOISTURE REMOVAL RATE	kg/h	4.1
	INDOOR UNIT (HEIGHT)	mm	362
	INDOOR UNIT (WIDTH)	mm	1259
	INDOOR UNIT (DEPTH)	mm	282
	OUTDOOR UNIT (HEIGHT)	mm	820
	OUTDOOR UNIT (WIDTH)	mm	900
	OUTDOOR UNIT (DEPTH-with Grill)	mm	320
FILTERS	CONVENTIONAL HD FILTER		YES
	TOP HD FILTER		NA
	PM2.5 MICRON FILTER (3M Brand)		NA
	PM2.5 MICRON FILTER		NA
	AG+ NANO FILTER		NA
	(AVG) ANTIVIRAL GUARD COATED FILTER		NA
FEATURES	REFRIGERANT		R32
	INVERTER TECHNOLOGY - QUATTRO		NA
	AIR DIRECTION CONTROL		YES
	SECURITY LOCK		YES
	IDU TEMP DISPLAY		Hidden Display
	REMOTE CONTROL TYPE		LCD Remote
	REMOTE BACKLIT (1.0)		Yes
	NEW REMOTE BACKLIT (2.0)		NA
	AUTO-OFF TIMER		YES
	AUTO-ON TIMER		YES
	SLEEP MODE		YES
	REFRIGERANT LEAKAGE DETECTOR		YES
	LOUVER POSITION MEMORY		YES
	DRY MODE		YES
	AUTO FAN SPEED		YES
	INTELLIGENT CRF ALERT		YES
	AUTO SWING		YES
	AUTO CLEANER (Defrost clean)		YES
	FOLLOW ME		YES
	AUTO MODE		YES
	AUTO RESTART		YES
	DOUBLE DRAIN (EASY INSTALLATION)		YES
	EASY INSTALLATION - SERVICE SUPPORT BRACKET IDU		NA
	GEAR (4-IN-1)		NA
	INSTA COOL/TURBO		YES
	MY MODE (Favorite mode)		YES
	TEMP DISPLAY ON/OFF		YES
	SILENT		NA
	4-WAY SWING		NA
	PRIME GUARD	ANTI-CORROSION COATING (BLUE) HYDROPHILIC BLUE COIL	Evap- Hair pin in side only Evap
	HIGH-AMBIENT WORKING		52°C
	HEAVY DUTY (100% RATED CAPACITY @43°C)		NA
	STABILIZER FREE OPERATION (Even @48°C, 135-280 V)		YES
	kW/SED DISPLAY		NA
	PRECISE TEMP CONTROL		NA
	ANTI MILD		YES
	INSTALLER FRIENDLY - PULL DOWN STRUCTURE		NA
	Wi-Fi (Ver 1.0)		NA
	Wi-Fi (Ver 2.0 AI+)		NA
	OTA SOFTWARE UPDATE (With Wi-Fi App)		NA
	GEO FENCING (With Wi-Fi App)		NA
	GOOGLE ACTION		NA
	AMAZON ALEXA		NA
	AC SELF CHECK (With Wi-Fi App)		NA
	3D SLEEP (With Wi-Fi App)		NA
	COMFERT MODE (With Wi-Fi App)		NA
	OTP INSTALLATION SETUP		NA
	AI ECOMASTER		NA
	DYNAMIC CIRCLE RESPONSIVE DISPLAY		NA
	MIDEA INTELLIGENCE (OFFLINE VOICE CONTROL)		NA

*All specifications as per IS1391 (Part 2): Room air-conditioner. Rounded off as per IS 2:1960 rules for rounding off numerical values.

Data shown herein is under test p conditions and may vary from model to model. As a continuing policy of product improvement, the design & specifications are subject to change without prior notice. *BEE (Bureau of Energy Efficiency) an autonomous body under Ministry of Power, Government of India, started this initiative of star rating basis ISEER ranging from 1 Star to 5 Star, Annual Electricity Consumption (Units or kWh basis 1600 hrs)

Max Air Flow Rate mentioned

WINDOW AIR CONDITIONERS

PARAMETER		UNIT	MARVEL CLS	MARVEL CLS
MODEL NO.			MAW12MR2R36F1	MAW18MR3R36F0
TONNAGE CATEGORY		T	1.0	1.5
LABEL PERIOD			"1st Jan,2026 - 31st Dec,2029"	"1st Jan,2026 - 31st Dec,2029"
BEE STAR RATING***			2 Star	3 Star
RATED CAPACITY*		Watt	3100	4900
NOMINAL POWER INPUT* Watts			982	1462
ANNUAL POWER CONSUMPTION		kWh	760.17	1131.74
ISEER VALUE		W/W	3.16	3.35
RATED POWER SUPPLY		Volts/Ph/Hz	230 - 1 - 50	230 - 1 - 50
NET WEIGHT		kg	42	49
PHYSICAL ASPECTS	OVERALL HEIGHT	mm	375	430
	OVERALL WIDTH	mm	560	660
	OVERALL DEPTH	mm	620	660
	AIR FLOW RATE	CFM	300	480
	NOISE LEVEL (H/M/L)	dB (A)	H-48 / L- 46	H- 56 / L - 52
	FAN MOTOR	(No. of speeds)	3	3
FILTER	ELECTROSTATIC FILTER		NA	NA
	ZEOLITE FILTER		NA	NA
	CHARCOAL/ACTIVE CARBON FILTER		NA	NA
	VITAMIN C FILTER		NA	NA
	DUST FILTER		YES	YES
FEATURES	AIR DIRECTION		2 Way	2 Way
	CONTROL TYPE		Non LCD Remote	Non LCD Remote
	TEMPERATURE DISPLAY (On panel)		YES	YES
	AUTO-OFF TIMER		YES	YES
	AUTO-ON TIMER		YES	YES
	SLEEP MODE		YES	YES
	DRY MODE		YES	YES
	TURBO MODE		YES	YES
	AUTO FAN SPEED		YES	YES
	ENERGY SAVER MODE		YES	YES
	EXHAUST COMMAND		NA	NA
	SMART TIME GUARD		NA	NA
	AUTO SWING		YES	YES
	AUTO RESTART		YES	YES
	HIGH-AMBIENT WORKING (at 230 V rated)		50°C	50°C
	REFRIGERANT		R32	R32
	ANTI-CORROSION COATING (Blue)		Evap- Hair pin in side	Evap- Hair pin in side

*All specifications as per IS1391 (Part 1) Room air-conditioner. Rounded off as per IS 2:1960 rules for rounding off numerical values.

**Data shown herein is under test conditions and may vary from model to model. As a continuing policy of product improvement, the design & specifications are subject to change without prior notice.

***BEE (Bureau of Energy Efficiency) an autonomous body under Ministry of Power, Government of India, started this initiative of star rating basis ISEER ranging from 1 Star to 5 Star, Annual Electricity Consumption (Units or kWh basis 1600 hrs)

Max Air Flow Rate mentioned

WINDOW AIR CONDITIONERS

PARAMETER		UNIT	MARVEL RYL
MODEL NO.			MIW19MR5R36F0
TONNAGE CATEGORY		T	1.5
LABEL PERIOD			"1st Jan,2026 - 31st Dec,2029"
BEE STAR RATING***			5 Star
FULL LOAD CAPACITY			5100
HALF LOAD CAPACITY			2550
FULL LOAD POWER INPUT*			1540
HALF LOAD POWER INPUT*			694
ANNUAL POWER CONSUMPTION		kWh	1053,94
ISEER VALUE		W/W	3,75
RATED POWER SUPPLY		Volts/Ph/Hz	230 - 1 - 50
RATED CURRENT		Amp	6.76
AIR FLOW RATE		CFM	415
NOISE LEVEL (H/M/L)			56 /54 /52
PHYSICAL ASPECTS	OVERALL HEIGHT	mm	430
	OVERALL WIDTH	mm	660
	OVERALL DEPTH	mm	660
	NET WEIGHT	kg	43
	FAN MOTOR	(No. of speeds)	3
FILTER	ELECTROSTATIC FILTER		NA
	ZEOLITE FILTER		NA
	CHARCOAL / ACTIVE CARBON FILTER		NA
	VITAMIN C FILTER		NA
	DUST FILTER		YES
	AIR DIRECTION		2 Way
FEATURES	WINDOW TYPE		Conventional
	CONTROL TYPE		LCD Remote
	ROOM TEMPERATURE DISPLAY		YES
	AUTO-OFF TIMER		YES
	AUTO-ON TIMER		YES
	SLEEP MODE		YES
	DRY MODE		YES
	TURBO MODE		YES
	AUTO FAN SPEED		YES
	ENERGY SAVER MODE		YES
	EXHAUST COMMAND		NA
	SMART TIME GUARD		NA
	AUTO SWING		YES
	AUTO RESTART		YES
	REFRIGERANT		R32
	FLEXICOOL		NA
	Wi-Fi (Optional)		NA
	GOOGLE ACTION(Optional)		NA
	AMAZON ALEXA (Optional)		NA
	HIGH-AMBIENT WORKING		52°C
	STABILIZER-FREE OPERATION (Even @48°C)		YES
	ANTI-CORROSION COATING (Blue)		Evap- Hair pin in side

*All specifications as per IS1391 (Part 1) Room air-conditioner. Rounded off as per IS 2:1960 rules for rounding off numerical values.

**Data shown herein is under test conditions and may vary from model to model. As a continuing policy of product improvement, the design & specifications are subject to change without prior notice.

***BEE (Bureau of Energy Efficiency) an autonomous body under Ministry of Power, Government of India, started this initiative of star rating basis ISEER ranging from 1 Star to 5 Star, Annual Electricity Consumption (Units or kWh basis 1600 hrs)

Max Air Flow Rate mentioned

REASONS TO BUY MIDEA ROOM AIR CONDITIONERS



Auto Fan Speed



Intelligent CRF Alert



Air Direction Control



Hidden Display



3D Sleep



Backlit Remote



Auto Swing



Follow Me



Security Lock



Auto Restart



Dry Mode



Auto-on/off Timer



Auto Mode



High Ambient Working



Refrigerant Leakage Detector



Prime Guard Hydrophilic Blue Coil



3D Cooling



Turbo Mode



Installer-Friendly PDS (Pulldown Structure)



Auto Cleaner (Defrost Clean)



Stabilizer Free even at 48°C, 135~280 V



Heavy Duty (100% rated capacity @43°C)



PM2.5 Filter


2026 non Wi-Fi Inverter models are Wi-Fi ready, and with the addition of a Wi-Fi module (at an additional component cost), these can be converted to Wi-Fi models. For updates, please contact our customer care: 1800 419 3333

*Terms and conditions apply. Product specifications, features, and offers are subject to change without prior notice.

**The features may vary depending upon the models.



make yourself at home

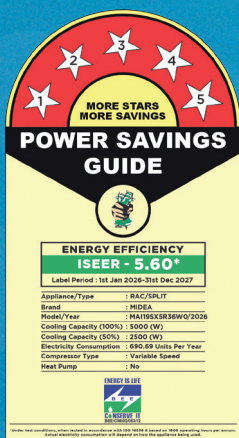

T&C apply. Features and star ratings vary from model to model.



Carrier Midea India Pvt. Ltd.

1st Floor, Pearl Tower, Plot No. 51, Institutional Area, Sector 32, Gurgaon-122001, Haryana. Ph: 0124 6144300



Carrier Midea India Pvt. Ltd.

Factory Address: Plot No. A-5, Supa-Parner Industrial Area, Ahmednagar, Maharashtra-414301



www.carriermideaindia.com
www.cmiestore.com



mideacare@carriermidea.com



Service Helpline: 1800 419 3333



www.facebook.com/mideaindia



Carrier Midea India



[midea_hvac_in](https://www.instagram.com/midea_hvac_in)



Scan to access
Branch Addresses



Scan to access
CMI WhatsApp Bot

Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose.

Disclaimer: As a continuing policy of product innovation at Midea, the design and specifications are subject to change without prior notice. The visuals of the products in the brochure are representative only, actual products might differ from the ones shown. 'Products mentioned in this brochure comply with RoHS regulations as per E-waste (Management & Handling) Rules, 2011 and should not be mixed with general household waste at the end of their useful life'. For more details kindly visit our website: www.carriermideaindia.com or contact Midea care: 1800 419 3333